

Varifocal Dome Cameras

JCC-VA925XD

1/3" Color Varifocal Dome Camera

JCC-VA928XD

1/3" High Res. Color Varifocal Dome Cameras



Model-A



Model-B

Features

- 1/3" SHARP Color CCD Sensor
- 380/480 TV Lines
- 0.1/0.2 Lux @F1.4
- Automatic Gain Control (AGC)
- Auto Electronic Shutter (AES)
- Auto White Balance (AWB)
- 0.45 Gamma Characteristic
- 3.7~12.0mm/F1.4 Auto Iris Lens
- DC 12V
- OSD Setup menu for Shutter Speed Selection, ATW/AWB/Manual White Balance Selection, BLC Adjustable Selection, Color Adjustable, Camera ID On/Off, Motion Detection On/Off, Privacy On/Off, Day & Night, Mirror On/Off

Specification


Model	JCC-VA925XD	JCC-VA928XD
Pick Up Element	1/3" SHARP Color CCD Sensor	
D.S.P.	Next-Chip D.S.P.	
Picture Element	NTSC: 537(H) x 505(V) PAL: 537(H) x 597(V)	NTSC: 811(H) x 508(V) PAL: 795(H) x 596(V)
Horizontal Frequency	NTSC: 15.734 KHz ; PAL: 15.625 KHz	
Vertical Frequency	NTSC: 59.94 Hz ; PAL: 50 Hz	
Synchronization	Internal	
Scanning System	2 : 1 Interlace	
Resolution	Horizontal 380 TV Lines	Horizontal 480 TV Lines
Minimum Illumination	0.1 Lux @F1.4	0.2 Lux @F1.4
S/N Ratio	More than 48 dB (AGC Off)	
Control	OSD	
Language	English, T.Chinese, S.Chinese, Japanese, Korean	
Basic function	Lens Selection (DC / VD / Manual) Shutter Selection (Auto / Fixed / Manual / FLK) ATW / AWB / Manual Selection, BLC(Area/ Ratio Adjustable) Selection AGC(0~40dB Adjustable) Selection, ADJUST -Contrast, Sharpness, CB_Gain, CR_Gain	
Extend function	Camera ID ON / OFF Motion Detection ON / OFF (64 Area, Position / Size / Sensitivity) Privacy Zone ON / OFF (4 Zone, Position / Size / Tone) Day & Night (Electronic Conversion) Mirror ON / OFF, Reset to Default	
Electronic shutter	1/60, 1/100, 1/250, 1/500, 1/2000, 1/5000, 1/10000, 1/100000(Fixed) Auto/ Manual 0 ~ 255 sections/AES, FLK mode	
White Balance	Automatic (2500 K ~ 9500 K)	
Gain Control	Automatic Gain Control	

Varifocal Dome Cameras

Specification

Lens Built-in	3.3 mm ~ 12.0 mm / F 1.4 DC Auto Iris Lens	
Video Output	1.0 Vp-p Composite Video Output; 75 Ohms	
Operating Temperature	- 10° ~ +50 °C / RH 85% or Less	
Power Consumption	Max. 1.7 W	Max. 2.6 W
Power Supply	DC 12V	
Dimension	Model A:134.5mm (Dia.) x 107mm (H) ; Model B: 106.8mm (Dia.) x 90.5mm (H)	
Optional Lens	2.6mm ~ 6.0mm/F1.4 Auto Iris Lens / 9.0mm ~ 22.0mm/F1.6Auto Iris Lens	

Dimension

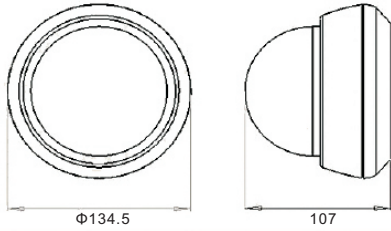

Optional



Wall-Mount Bracket
for Model-B

■ WMB-X13